



P-6200 Outdoor Body & Foot Shower



P-6200-XX Outdoor Body & Foot Shower

The deep, rich Sky Blue standard color and scratch resistant finish make these showers an excellent choice for resorts, beach front areas, sports facilities and recreational areas. Shower towers are designed to defy the elements, resist vandals and stand up to hard everyday use. Heavy-duty design and construction are made to stand up to the toughest environments. All waterways are lead free.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- Vandal resistant access plates for security and simple future maintenance
- Mist heads are made from heavy-duty materials and are timer controlled
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button requires less than 5 lbs of force and is manufactured from chrome plated brass for reliability and long wear life
- Simple flow adjustment without dismantling of the fountain with a water flow of 2.5 GPM
- All flow paths are lead-free with reinforced stainless-steel tubing that comply with NSF-61 standards.
- In-line mesh screen Y strainer
- 1/2" Inlet stop valve for simple future maintenance.
- Standard Sky Blue finish with optional colors available
- Custom color orders are non-cancellable and non-returnable

ORDERING

P-6200-XX

- Color
- BK- Black
 - *BL- Blue
 - BZ- Bronze
 - CC- Chrome Clear
 - GR- Green
 - OR- Orange
 - RD- Red
 - SD- Sand
 - SV- Silver
 - WH- White
 - YL- Yellow

POWDER COAT COLORS





*Standard Sky Blue Finish

ROUGH-IN DIMENSIONS

These rough-in dimensions may vary 1/2" (13 mm) plus or minus

P-6200-XX 80"H x 6-5/8"Dia.

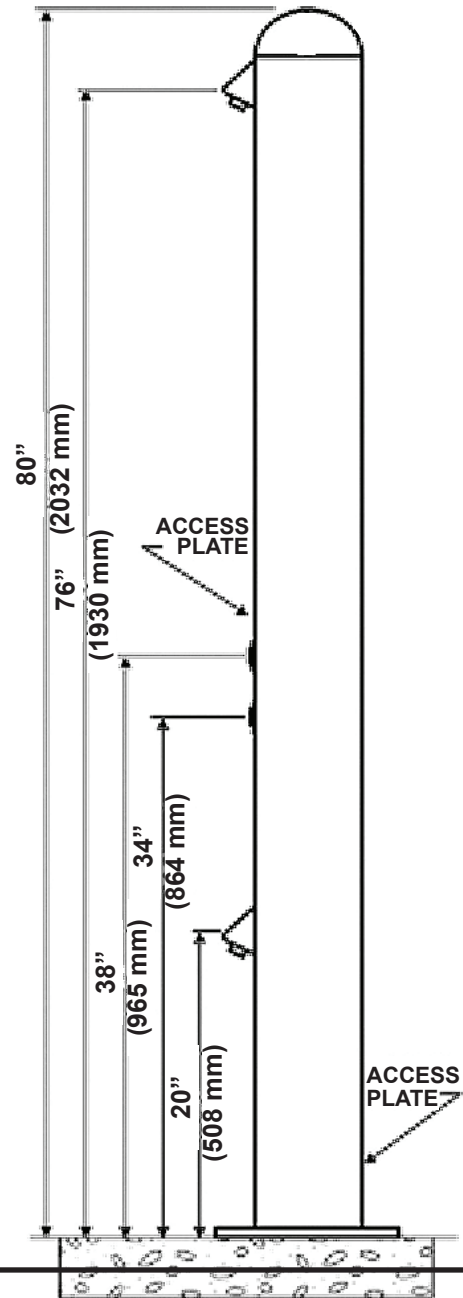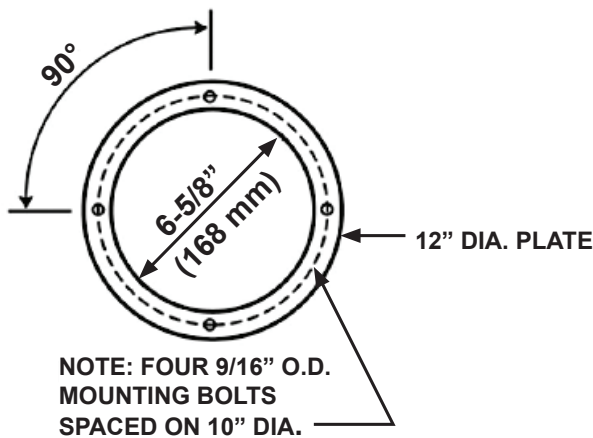

REPLACEMENT PARTS/ KITS

P-231-0175 Air Valve Push Button Regulator

P-231-0277 Push Button Assembly

P-321-0023 C-Clip

SMP-6 Surface Mounting Plate

SPECS

Furnish and install the PRIER Outdoor Body and Foot Shower (specify model color). Shower towers shall be carbon steel and a powder coated finish. Chrome plated brass mist heads shall have a water pressure range of 30-80 PSI. Shower towers shall provide simple flow adjustment without requiring dismantling of fountain with a water flow of 2.5 GPM. Welded anchor base shall be 1/2" thick. Push buttons shall require less than 5 lbs of force. Shower towers shall be installed per manufacturers recommendations and instructions. Shower tower flow paths are lead-free with reinforced stainless-steel tubing that comply with NSF-61 standards. Made in the USA.