


# C-108 REPLACEMENT PARTS



ID	Part No.	Description	ID	Part No.	Description
1	See Replacement Stem Section	Stem Assembly, Contains: 1, 4, 16	10	324-0013	Retaining Ring, Stainless Steel
2	300-1008	Valve Stem Cap	11	346-0006	Flat Washer EPDM 70A
3	C-134KT-805	Handle and Screw Kit (Green)	12	300-0061	Brass Elbow
4	C-134KT-802	Seat Washer Kit (00 Beveled)	13	C-108KT-805	Red Handle and Screw Kit
5	C-134KT-803	Stem Packing Kit	14	336-0002	Backflow Check Valve for C-108
6	C-108KT-808	Loose Key on Lanyard	15	310-1015	Loose Key Valve Stem Cap
7	300-0060	Adapter Swivel Nut		C-134KT-804	Loose Key Conversion Kit, Contains: 5, 6, 17
8	336-0038	Head O-Ring EPDM 70A		C-234KT-804	Key to Loose Handle
9	336-0026	Nut O-Ring EPDM 70A		C-108KT-811	Swivel Vacuum Breaker & Arm Assembly, Contains: 7, 8,9,10,11,12

# REPLACEMENT STEMS

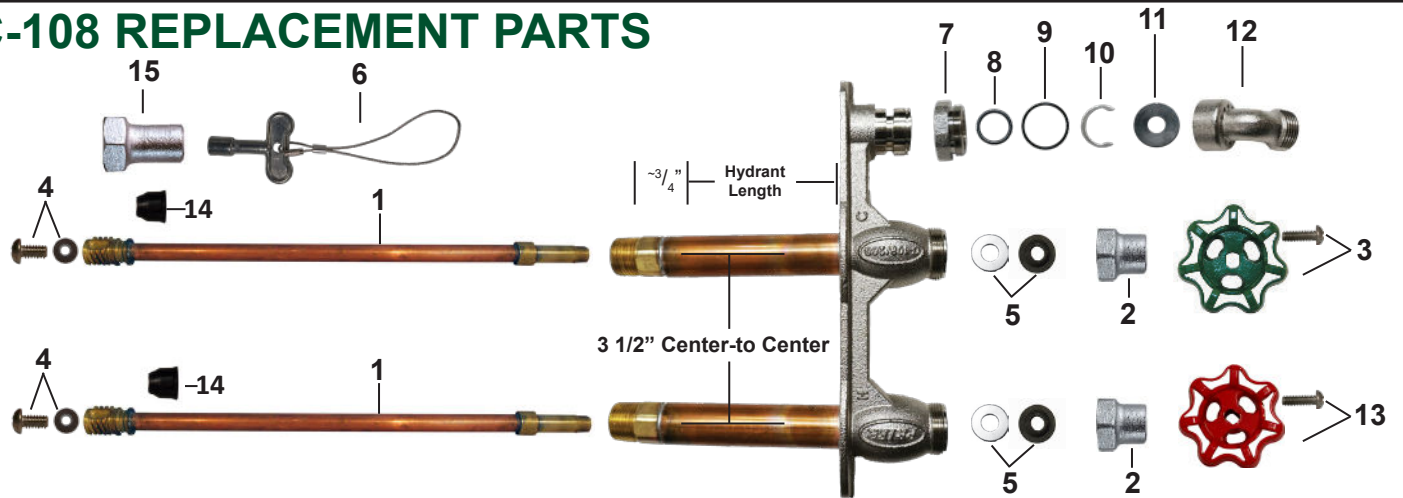

**G Style Manufactured April 2013 - Present**

Part No.	Style	Stem Length	Description
P-231-12CC	G	4 7/16" OAL	Close Coupled Stem for C-108 Hydrant
P-231-1204	G	6 15/16" OAL	Stem for C-108 Series 4" Hydrant
P-231-1206	G	8 15/16" OAL	Stem for C-108 Series 6" Hydrant
P-231-1208	G	10 15/16" OAL	Stem for C-108 Series 8" Hydrant
P-231-1210	G	12 15/16" OAL	Stem for C-108 Series 10" Hydrant
P-231-1212	G	14 15/16" OAL	Stem for C-108 Series 12" Hydrant
P-231-1214	G	16 15/16" OAL	Stem for C-108 Series 14" Hydrant
P-231-1216	G	18 15/16" OAL	Stem for C-108 Series 16" Hydrant
P-231-1218	G	20 15/16" OAL	Stem for C-108 Series 18" Hydrant
P-231-1220	G	22 15/16" OAL	Stem for C-108 Series 20" Hydrant
P-231-1222	G	24 15/16" OAL	Stem for C-108 Series 22" Hydrant
P-231-1224	G	26 15/16" OAL	Stem for C-108 Series 24" Hydrant
P-231-12US	G	Up to 16 15/16" OAL	*Universal Replacement Stem for C-108 Hydrant


\*For stems manufactured before 2013, see C-108 Series retired style spec sheet at PRIER.com. PRIER universal stems are replacement stems for any size from close coupled to 14." The P-231-02US Universal Stem requires cutting the rod to proper length and soldering the brass stem end to the rod as directed in instructions.

**OLD STYLE**  
**Manufactured 1972-April 2013**



4515 East 139th Street  
 Grandview, MO 64030  
 (800) 362-9055  
 Fax (800) 362-1463  
 www.PRIER.com


## C-108/208 Hot & Cold Wall Hydrant

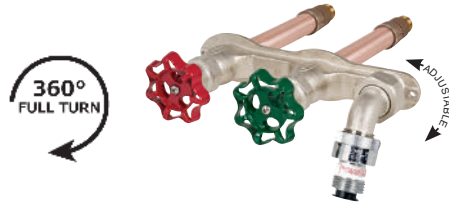

- Freezeless
- Hot & Cold Mixing
- Anti-Siphon



Replacement Parts and Stems

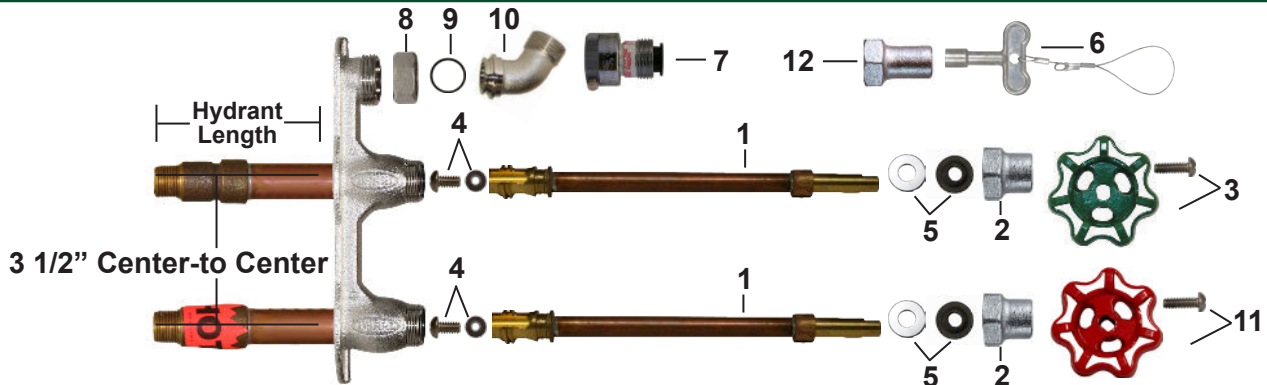

ID	Part No.	Description	ID	Part No.	Description
1	See Below	Stem Assembly, Contains: 1, 4	8	300-0030	Hose Thread Nut
2	300-1008	Valve Stem Cap	9	336-0005	O-Ring for Hose Thread Adapter
3	C-134KT-805	Oval Handle and Screw Kit	10	300-0029	Hose Thread Adapter
4	C-134KT-802	Seat Washer Kit (00 Beveled)	11	C-108KT-805	Red Handle and Screw Kit
5	C-134KT-803	Stem Packing Kit	12	310-1015	Loose Key Valve Stem Cap
6	C-108KT-808	Loose Key on Lanyard		C-134KT-804	Loose Key Conversion Kit, Contains: 5, 6, 12
7	P-003CP	Replacement Vacuum Breaker			



**E Style Manufactured 1972 - April 2013**

Part No.	Style	Stem Length	Description
P-231-02CC	E	5 <sup>11</sup> / <sub>32</sub> " OAL	Close Coupled Stem for C-108 Hydrant
P-231-0204	E	7 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0206	E	9 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0208	E	11 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0210	E	13 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0212	E	15 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0214	E	17 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0216	E	19 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0218	E	21 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0220	E	23 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0222	E	25 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-0224	E	27 <sup>19</sup> / <sub>32</sub> " OAL	Stem for C-108 Hydrant
P-231-02US	E	Up to 16 <sup>19</sup> / <sub>32</sub> " OAL	*Universal Replacement Stem for C-108 Hydrant

*PRIER Universal Stems are replacement stems for any size from Close Coupled to 14". They require cutting the rod to proper length and soldering the brass stem end to the rod as directed in instructions.*