



C-134KT-808 ADA HANDLE OPERATING KIT

REPLACEMENT PART FOR SELECT PRIER WALL HYDRANTS

Purpose

Instructions to replace PRIER handles on: P-164, P-154, C-144, C-434, C-134 & Angle Sill Faucets

Included Parts

- ADA Handle
- Brass Adapter
- Stainless Steel Screw


Tools Required

- Phillips Screwdriver

Installation Instructions


1. Remove the existing handle

Using a screwdriver, remove the screw from the center of the existing handle. Pull the handle straight off the stem.

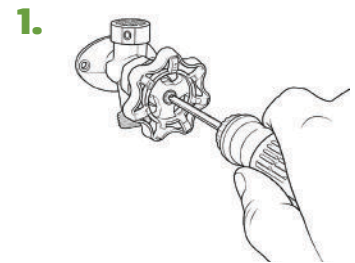


2. Install the adapter

Place the adapter onto the hydrant stem. The adapter allows the ADA handle to be oriented in the desired operating position.

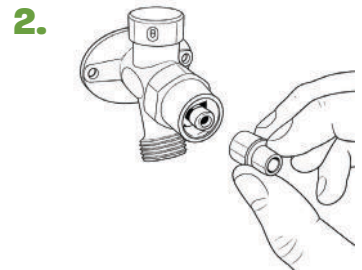


3. Install the ADA handle

Slide the ADA handle onto the adapter. Confirm that the handle is fully seated in your desired closed position.

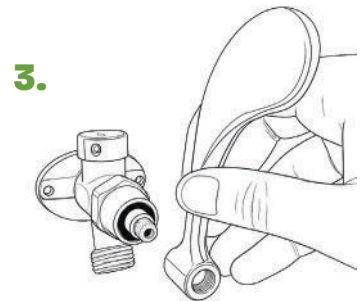

4. Secure the handle

Insert the provided screw through the ADA handle and into the adapter/stem. Tighten the screw until the handle is secure. Do not overtighten.

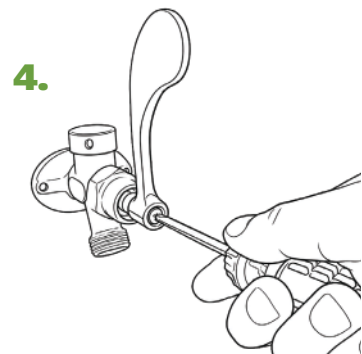

5. Check operation

Open and close the hydrant to confirm smooth operation and proper handle orientation. Ensure the handle does not slip or interfere with the wall or surrounding components. If handle slips, tighten packing/bonnet nut 1/4 turn.

Note

The hydrant must be in the closed position before removing or installing the handle. Do not force handle closed, excessive force may damage stem.