




4515 East 139th Street  
 Grandview, MO 64030  
 (800) 362-9055  
 Fax (800) 362-1463  
 www.PRIER.com

## C-108/208 Freezeless Hot & Cold Wall Hydrant

Application

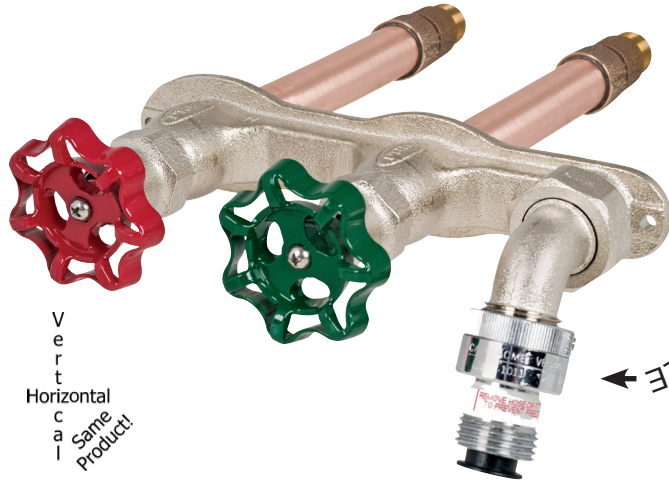

- Residential/Commercial
- Freezeless
- Anti-Siphon
- Backflow Check Valve
- Self-Draining
- Hot & Cold Mixing

PRIER C-108 provides a year round source of tempered water to areas of structures that are subject to freezing temperatures. The hydrant valve is connected to the supply piping in the heated portion of the structure, eliminating the possibility

of freezing. Hot side is loose key operated to prevent unauthorized operation or accidental operation by children. Due to its patented design, the same product is available as horizontal or vertical. Ordering the C-208 gives you the same style hydrant but with vandalproof extended lockshields with operating key on both Hot & Cold stems.

The PRIER C-108 has all the characteristics of the historically proven C-134 with the added protection of a self-draining Anti-Siphon Vacuum Breaker and Backflow Check Valve. It is available from stock in lengths from Close Coupled to 24"; longer sizes are available on request.

Features

- Horizontal or Vertical installation with same product
- Anti-Siphon Vacuum Breaker with Backflow Check Valve
- Internal checks to prevent thermal migration
- 3 1/2" Center-to-Centers-installation template provided
- Enclosed Screwholes easily secure mounting screws
- Solid Brass Body, Valve Stem Cap, Seat and Stem Ends
- Satin Nickel Plated Body maintains nice finish indefinitely
- Stainless Steel Seat Washer Screw & Handle Screw
- Full Circle ACME Threads secure Stem and Seat End
- Lock Shield Cap for stronger valve design
- AFG Teflon with Graphite Packing for easy maintenance
- Standard "OO" Size Seat Washer
- Recessed Spout Aligning Lugs

Ordering

**C-108D10**

**Operator** →  
 1- Handle Operated  
 2- Vandalproof Lockshield

**Inlet** ↓  
 D- 1/2" MPT x 1/2" SWT  
 S- 3/4" Male SWT x 3/4" SWT  
 F- 3/4" MPT x 3/4" SWT  
 T- 3/4" MIP x 1/2" FPT  
 W- 1/2" Wirsbo PEX  
 X- 1/2" Crimp PEX

**Length**  
 CC- Close Coupled  
 04- 4" Insertion  
 06- 6" Insertion  
 08- 8" Insertion  
 10- 10" Insertion  
 12- 12" Insertion  
 14- 14" Insertion  
 16- 16" Insertion  
 18- 18" Insertion  
 20- 20" Insertion  
 22- 22" Insertion  
 24- 24" Insertion  
 XX- Special Size

Inlet Styles

**D Style**  
 1/2" MPT x 1/2" SWT



**S Style**  
 3/4" Male SWT x 1/2" SWT



**F Style**  
 3/4" MPT x Female SWT



**T Style**  
 3/4" MPT x 1/2" FPT



**W Style**  
 1/2" Wirsbo  
 PEX



**X Style**  
 1/2" PEX




**C-108/208**



4515 East 139th Street  
Grandview, MO 64030  
800-362-9055  
Fax 800-362-1463

**Parts for C-108/208 Hot & Cold Freezeless Wall Hydrants**

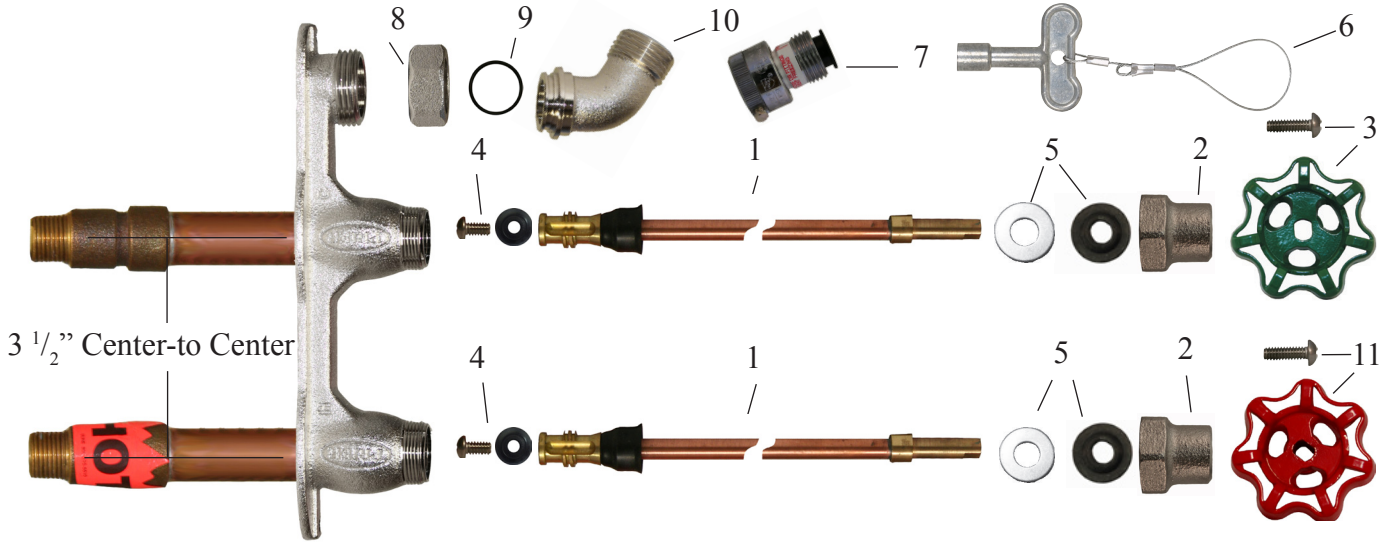

ID	Part No.	Description	ID	Part No.	Description
1, 4	Stem Assembly	See Chart Below	7	P-003CP	Replacement Vacuum Breaker
2	300-1008	Valve Stem Cap	8	300-0030	Hose Thread Nut
3	C-134KT-805	Oval Style Handle & Screw Kit	9	336-0005	O-Ring for Hose Thread Ad.
4	C-134KT-802	Stem Washer & Screw Kit	10	300-0029	Hose Thread Adapter
5	C-134KT-803	Stem Packing Replacement Kit	11	C-108KT-805	Red Handle & Screw Kit
6	C-108KT-808	Operating Key on Lanyard			

**Replacement Stems for C-108/208 Hydrants**



PRIER Universal Stems are replacement stems for any size from Close Coupled to 14". They require cutting the rod to proper length and soldering the brass stem end to the rod as directed in instructions.

Part Number	Style	Description
231-02CC	E	Close Coupled E Style Stem for C-144 5 1/16" OAL
231-0204	E	4" E Style Stem for C-144 7 9/16" OAL
231-0206	E	6" E Style Stem for C-144 9 9/16" OAL
231-0208	E	8" E Style Stem for C-144 11 9/16" OAL
231-0210	E	10" E Style Stem for C-144 13 9/16" OAL
231-0212	E	12" E Style Stem for C-144 15 9/16" OAL
231-0214	E	14" E Style Stem for C-144 17 9/16" OAL
231-0216	E	16" E Style Stem for C-144 19 9/16" OAL
231-0218	E	18" E Style Stem for C-144 21 9/16" OAL
231-0220	E	20" E Style Stem for C-144 23 9/16" OAL
231-0222	E	22" E Style Stem for C-144 25 9/16" OAL
231-0224	E	24" E Style Stem for C-144 27 9/16" OAL
231-02US	E	Universal Stem for E Style C-144