




4515 East 139th Street
 Grandview, MO 64030
 (800) 362-9055
 Fax (800) 362-1463
 www.PRIER.com

Application

C-134/234 Freezeless Wall Hydrant

Original Heavy Duty Style

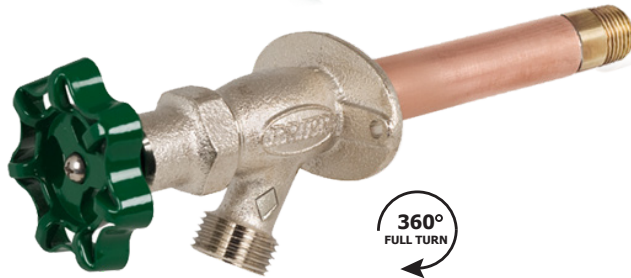

- Residential
- Freezeless



PRIER C-134 provides a year round source of water to areas of structures that are subject to freezing temperatures. The hydrant valve is connected to the supply piping in the heated portion of the structure, eliminating the possibility of freezing. Ordering the C-234 gives you the same style hydrant but with a vandalproof extended lockshield with operating key.

The PRIER C-134 is the original freezeless hydrant that is made in the same heavy pattern fashion that made it famous. It is available from stock in lengths from Close Coupled to 24", longer sizes are available on request.

Features

- Integral cast flange with built-in drainage pitch
- Enclosed screwholes easily secure mounting screws
- Solid brass body, valve stem cap, seat and stem ends
- Satin nickel plated body maintains attractive finish
- Stainless steel seat washer screw and handle screw
- Powder coated cast aluminum handle
- Durable ACME threads secure stem at seat end
- Lock shield cap for stronger valve design
- AFG teflon with graphite packing for easy maintenance
- Standard "OO" size seat washer
- Machined Spout Aligning Mark
- New slim seat inlet for easier installation

Inlet Styles

D Style 1/2" MPT x 1/2" SWT	
F Style 3/4" MPT x 3/4" SWT	
S Style 3/4" Push-On x 1/2" SWT	
T Style 3/4" MPT x 1/2" FPT	
W Style 1/2" Wirsbo PEX	
X Style 1/2" Crimp PEX	
FX Style 3/4" Crimp PEX	


Ordering

C-134D10		Length
Operator	Inlet	
1- Handle Operated	D- 1/2" MPT x 1/2" SWT	CC- Close Coupled
2- Vandalproof Lockshield	F- 3/4" MPT x 3/4" SWT	04- 4" Insertion
	S- 1/2" SWT x 3/4" PUSH-ON	06- 6" Insertion
	T- 3/4" MIP x 1/2" FIP	08- 8" Insertion
	W- 1/2" Wirsbo PEX	10- 10" Insertion
	X- 1/2" Crimp PEX	12- 12" Insertion
	FX- 3/4" Crimp PEX	14- 14" Insertion
		16- 16" Insertion
		18- 18" Insertion
		20- 20" Insertion
		22- 22" Insertion
		24- 24" Insertion
		XX- Special Size



4515 East 139th Street
Grandview, MO 64030
(800) 362-9055
Fax (800) 362-1463
www.PRIER.com

Parts for C-134/234 Freezeless Wall Hydrants

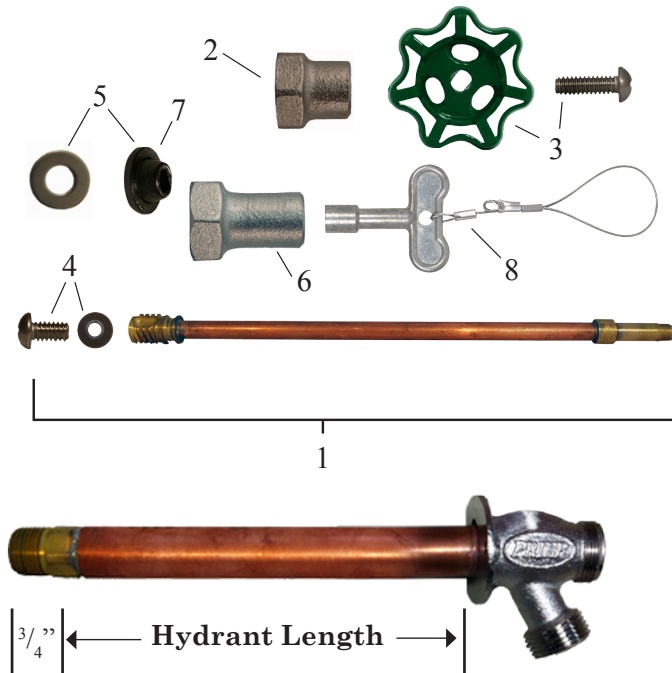

ID	Part No.	Description
1	See Chart Below	Stem Assembly
2	300-1008	Valve Stem Cap
3	C-134KT-805	Oval Handle & Screw Kit
4	C-134KT-802	Seat Washer Replacement Kit-00 Beveled
5	C-134KT-803	Stem Packing Replacement Kit
6	310-1015	Valve Stem Cap for Loose Key
7	390-1001	Stem Packing Only
8	C-108KT-808	Oval Style Key on Lanyard
	C-134KT-804	Loose Key Conversion Kit, Contains: 5, 6, 8
	C-134KT-807	C-134 Overhaul Kit, Contains: 3, 4, 5

Replacement Stems for C-134/234 Hydrants



* PRIER Universal Stems are replacement stems for any size from Close Coupled to 14". They require cutting the rod to proper length and soldering the brass stem end to the rod as directed in instructions.

For old style C-134 Series Hydrant Stems see C-134 Series Retired Style Spec Sheet @ www.PRIER.com

Part No.	Style	Description	Stem Length
231-11CC	G	Close Coupled Stem for C-134 Hydrant	4 ³ / ₈ " OAL
231-1104	G	Stem for 4" C-134 Hydrant	6 ⁷ / ₈ " OAL
231-1106	G	Stem for 6" C-134 Hydrant	8 ⁷ / ₈ " OAL
231-1108	G	Stem for 8" C-134 Hydrant	10 ⁷ / ₈ " OAL
231-1110	G	Stem for 10" C-134 Hydrant	12 ⁷ / ₈ " OAL
231-1112	G	Stem for 12" C-134 Hydrant	14 ⁷ / ₈ " OAL
231-1114	G	Stem for 14" C-134 Hydrant	16 ⁷ / ₈ " OAL
231-1116	G	Stem for 16" C-134 Hydrant	18 ⁷ / ₈ " OAL
231-1118	G	Stem for 18" C-134 Hydrant	20 ⁷ / ₈ " OAL
231-1120	G	Stem for 20" C-134 Hydrant	22 ⁷ / ₈ " OAL
231-1122	G	Stem for 22" C-134 Hydrant	24 ⁷ / ₈ " OAL
231-1124	G	Stem for 24" C-134 Hydrant	26 ⁷ / ₈ " OAL
231-01US	G	*Universal Replacement Stem for C-134 Hydrant	Up to 16 ⁷ / ₈ " OAL