

P-9000 Pet Drinking Fountain









P-9000-XX Pedestal Pet Drinking Fountain

The P-9000-XX pet fountain is great for resorts, parks, walking trails and any where pets are welcome. The deep, rich Woodland Green standard color, and scratch resistant finish, are designed to comply with pet needs and withstand the roughest conditions. Fountains are designed to defy the elements, resist vandals and stand up to hard use. Heavy-duty design and construction are made to stand up to the toughest environments. All waterways are lead free.

FEATURES

- All steel heavy-duty construction with welded and ground joints for a clean and tidy appearance
- Vandal resistant access plates for security and simple future maintenance
- Vandal resistant bubbler guard assures years of service
- Water pressure range of 30-80 PSI
- Anchor installed mounting plate comes standard, optional ground installed mounting plate (SMP-6) available as an option for installation assistance
- Recessed push button is manufactured from chrome plated brass for reliability and long wear life.
- Simple flow adjustment without dismantling of the fountain with a water flow of 0.5 GPM
- Fountain bowl is heavy duty 18 gauge stainless steel with brushed finish and vandal-resistant chrome plated brass strainer. A drain tool is included with each fountain
- All flow paths are lead-free with reinforced stainless-steel tubing that comply with NSF-61 standards.
- In-line mesh screen Y strainer
- ½" Inlet stop valve for simple future maintenance
- 1 1/4" IPS waste pipes included on each fountain
- Standard Woodland green finish with optional colors available
- Custom color orders are non-cancellable and non-returnable

ORDERING

P-9000-<u>XX</u>

Color

BK- Black

BL- Blue **BZ-** Bronze

CC- Chrome Clear

*GR- Green

OR- Orange

RD- Red

SD- Sand

SV- Silver

WH- White YL- Yellow

POWDER COAT COLORS




^{*}Standard Woodland Green Finish

ROUGH-IN DIMENSIONS

These rough-in dimensions may vary 1/2" (13 mm) plus or minus

P-9000-XX 32"H x19-1/8"W x 6-5/8"Dia.

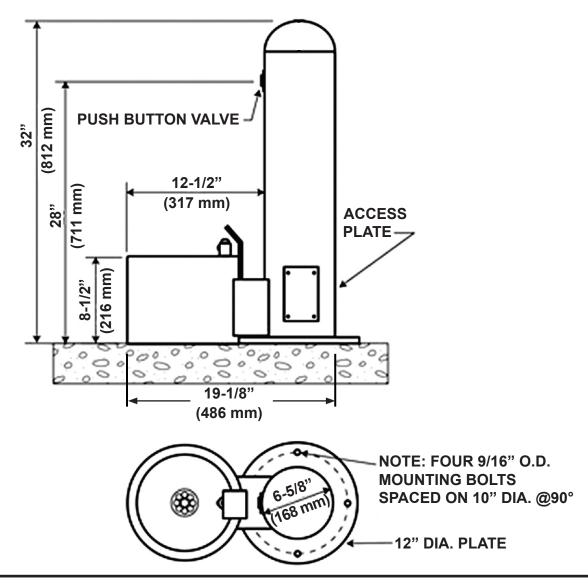

REPLACEMENT PARTS/KITS

P-231-0260 Chrome Plated Theft Proof Drain

P-231-0262 Push Button Assembly

P-337-0053 1-1/4" OD x 7/8" ID 1/8" TK Rubber Washer

SMP-6 Surface Mounting Plate

SPECS

Furnish and install the PRIER P-9000-XX pet fountains (specify model color). Pet fountain shall be carbon steel and a powder coated finish. Fountain shall have chrome plated brass bubblers with vandal resistant bubbler guard. Water pressure range shall be 30-80 PSI. Fountains shall provide simple flow adjustment without requiring dismantling of fountain with a water flow of 0.5 GPM. Welded anchor base shall be 1/2" thick. Joints must be welded and ground smooth. Push buttons shall require less than 5 lbs of force in compliance with ADA code. Fountains shall be installed per manufacturers recommendations and instructions. Pet fountain flow paths are lead-free with reinforced stainless-steel tubing that comply with NSF-61 standards. Made in the USA.